

# RETIGA-4000R

**FAST1394**

## Monochrome or Color

The **QImaging® Retiga-4000R** digital camera features enhanced well capacity and resolution resulting in high sensitivity that is perfect for brightfield, LCD inspection, and automated imaging applications. A progressive-scan interline CCD sensor gives a resolution of 4.19 million pixels with an aspect ratio of 1:1 in a 12-bit digital output — making it ideally suited for the 22mm light column provided by many microscope camera mounts. High-speed, low-noise electronics provide linear digital data for rapid image capture. The IEEE 1394 FireWire digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The Retiga 4000R includes QCapture software (Windows® and Mac OS) for real-time image preview and capture. A **Software Development Kit (SDK)** is available upon request for interfacing with custom software.

## applications

- Brightfield, Phase-Contrast, & Darkfield Microscopy
- Fluorescence Imaging
- Pathology, Histology, & Cytology
- DNA Analysis
- Metallurgical Microscopy
- LCD Inspection
- Manufacturing Quality Control
- Failure Analysis
- Forensic Analysis
- Automated Imaging

## High Sensitivity IEEE 1394 FireWire® Digital CCD Camera



features	benefits
High-Resolution, 4.19-Million-Pixel Sensor	<ul style="list-style-type: none"> <li>▪ Highly detailed, sharp images</li> </ul>
Large Pixels (7.4µm x 7.4µm)	<ul style="list-style-type: none"> <li>▪ High sensitivity, high dynamic range, large well capacity</li> </ul>
ROI (Region of Interest)	<ul style="list-style-type: none"> <li>▪ Higher frame rates for precise analysis of rapidly changing specimens</li> </ul>
Low-Noise Electronics	<ul style="list-style-type: none"> <li>▪ Quantitation &amp; imaging of low light levels</li> </ul>
12-Bit Digitization/ 36-Bit Color Digitization (with Optional RGB Filter)	<ul style="list-style-type: none"> <li>▪ 4096 grey levels for precise light-intensity discrimination</li> <li>▪ 4096 levels per channel for superior color images</li> </ul>
External Sync & Trigger	<ul style="list-style-type: none"> <li>▪ Tight synchronization with flashlamps, automated filters, shutters, &amp; microscope stages</li> </ul>
Peltier Cooling	<ul style="list-style-type: none"> <li>▪ Minimizes thermal noise during low-light, long-exposure imaging</li> </ul>
Binning	<ul style="list-style-type: none"> <li>▪ Increases sensitivity for quantitation &amp; imaging of very low light levels</li> <li>▪ Increases frame rate</li> </ul>
IEEE 1394 FireWire Connection	<ul style="list-style-type: none"> <li>▪ Simple connectivity</li> <li>▪ Ease of use &amp; installation</li> <li>▪ Portability with laptop computer</li> <li>▪ Simultaneous use of multiple cameras through a single port</li> <li>▪ Single-cable operation (no external power supply or control unit)</li> </ul>
Extensive Application Software Support	<ul style="list-style-type: none"> <li>▪ Choose from a large selection of life science &amp; industrial software for microscopy, machine vision, &amp; video-streaming functions</li> </ul>

# RETIGA-4000R FAST1394 Specifications

## ccd sensor

Light-Sensitive Pixels	4.19 million; 2048 x 2048
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	10µs to 17.9min in 1µs increments
Sensor Type	Kodak® KAI-4021 progressive-scan interline CCD (monochrome or color)
Pixel Size	7.4µm x 7.4µm
Linear Full Well	40,000e- (1x1); 80,000e- (2x2)
Read Noise	12e- @ 20MHz
Dark Current	1.64e-/pix/s
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5MHz
Frame Rate	4fps full resolution @ 12 bits (125fps maximum with binning and ROI functions)

## camera

Computer Platforms/ Operating Systems	Windows® 7, Vista and XP (32/64 bit)
Digital Interface	IEEE 1394 FireWire
Sustained Image Data Rate	40MB/s
Shutter Control	Electronic shutter, no moving parts
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
Gain Control	0.549 to 26.2x
Offset Control	-2048 to 2047
Optical Interface	F-mount optical format; aspect ratio 1:1
Threadmount	1/4" — 20 mount
Power Requirements	17W (cooled), 11W (non-cooled)
Weight	845g
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35 °C (95°F)

## camera models

Includes: IEEE 1394 FireWire cable, IEEE 1394 PCIe card, QCapture software, and access to SDK

### ■ Monochrome Retiga 4000R:

Model: RET-4000R-F-M-12-C

### ■ Color Retiga 4000R:

Model: RET-4000R-F-CLR-12-C

## camera options




- RGB Color Filter for monochrome cameras (F-mount interface required), refer to the RGB filter datasheet for more details



*Retiga-4000R 4x4 and 8x8 binning not supported with the RGB filter*

- Extended Warranty

## spectral response

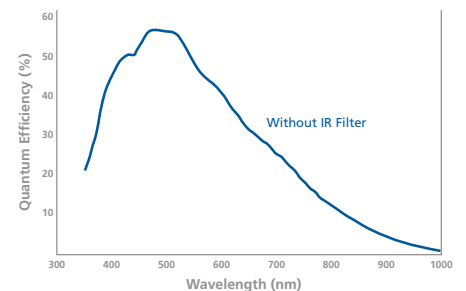

Tel 604.530.5800 ■ Fax 604.539.1825 ■ info@qimaging.com  
www.qimaging.com

\*Refer to Qimaging website for detailed listing of supported operating systems.  
Note: Specifications are typical and subject to change.

Retiga is a trademark of Qimaging Corporation.  
Qimaging is a registered trademark of Qimaging Corporation.  
Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.