**MICROFIRE®**

1600x1200P

Research Grade Photomicrography

Microfire® is a real-time progressive scan true color microscope camera developed for accurate color microscope image documentation and analysis.

- **2-Megapixel Color Imaging with 7.4 x 7.4 Micron Pixels**

1600 X 1200 effective pixels creates exceptional image detail and dynamic range in both brightfield and low-light fluorescent images.

- **Optronics Exclusive PictureFrame®**

Comprehensive image processing suite with measurement and annotation, scale bar, AVI file-compliant time-lapse imaging, automated image archiving, six position image mixing functionality, flat field correction, background subtraction, live frame averaging with motion compensation and more...

- **Direct X Powered**

Real-time, full resolution, full screen preview.

- **Intuitive Human Interface**

Powerful software – simple interface means images are captured effortlessly with Optronics point and shoot simplicity.

- **TWAIN Compatible Software**

Instantaneous integration within popular imaging applications.


- **FireWire® Interface**

Offers “Plug and Play” connectivity from a desktop or laptop computer with data transfer up to 400 mbs.

Technical Specifications

MICROFIRE

| | |
|-----------------------------------|--|
| Mechanical Specifications: | (L x W x H): 5.3 x 5.3 x 2.3 Inches |
| CCD Array: | 1600 x 1200 pixels / Progressive scan interline CCD |
| Pixel Size: | 7.4 x 7.4 micron pixels |
| Well Depth: | 40,000 electrons |
| Active Area: | 13.38mm x 9.52mm, 14.8mm diagonal |
| Computer Interface: | IEEE 1394 (FireWire®), 6 pin |
| Software: | Optronics® native application PictureFrame®, SDK available, Twain, Rincon™, Longboard™ |
| Optical Interface: | C-mount (1-32 Thread), 17.5mm back focus |
| Electronic Shutter: | 500 microseconds - 60 seconds |
| Frame Rates: | 10 FPS @ 1600 x 1200 18 FPS @ 800 x 600 (2x2 binning) 24 FPS @ 512 x 400 (3x3 binning) 30 FPS @ 400 x 300 (4x4 binning) 48 FPS @ 100 x 100 (5x5 binning) |
| Binning Modes: | 1 x 1, 2 x 2, 3 x 3, 4 x 4 |
| Subframes Modes: | User-defined number of lines, in multiples of 2 Range: 100 - 1200 lines, 64 - 1600 columns |
| Bit Depth: | 36-bit color |
| Spectral Response Curve: | |

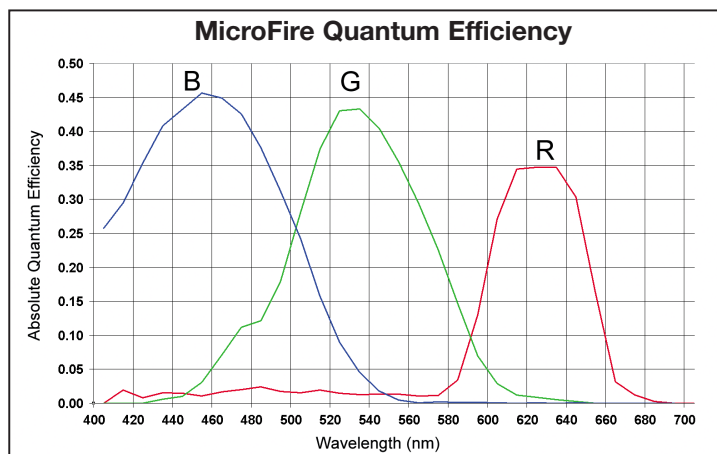

System Recommendations: PC - 2 GHz or better PC Running Windows® 2000/XP/Vista
32-bit color 512 MB Ram
MACINTOSH - G4 OS X Version 10.2 or better 512 MB Ram

Warranty: 2 years

FireWire® is a federally registered trademark owned by Apple Computer Inc.
Kodak® is a federally registered trademark of Eastman Kodak Corp.
Mac and the Mac logo are trademarks of Apple Computer, Inc., registered in the U.S. and other countries.
Microsoft, Windows, and the Microsoft logo are trademarks of Microsoft Computer, Inc., registered in the U.S. and other countries.

Monitor is for illustration purpose only. Sold separately.



Windows
Vista
Compatible

