

ROLERA-MGi *FAST1394*

High-Speed, Extremely Sensitive IEEE 1394 FireWire® Digital EMCCD Camera

The **QImaging® Rolera-MGi** back-illuminated EMCCD camera combines >90% QE with the convenience of FireWire IEEE 1394. The Rolera-MGi features the 512 x 512 L3Vision Frame-Transfer EMCCD from e2v Technologies, enabling charge to be multiplied before readout in order to provide fast detection for low-light-level applications. Capable of capturing 300+ frames per second with binning and ROI, the Rolera-MGi allows single-photon detection for applications such as live-cell confocal microscopy.

camera models

Includes: IEEE 1394 FireWire cable, IEEE 1394 PCI card, power supply, QCapture Suite software and access to SDK


■ Monochrome Rolera-MGi

Model: ROL-MGi-F-M-14-C


camera options

- Extended Warranty

emccd architecture

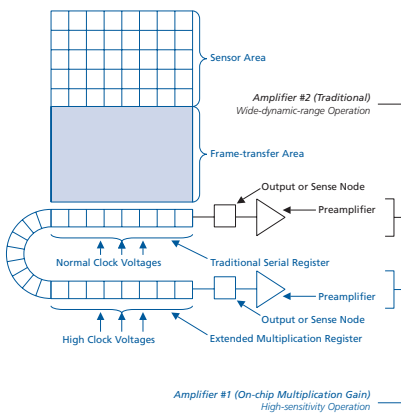

Note: Lens shown for illustration only and is not included.



features

High Quantum Efficiency

High-Speed Readout

Low-Noise Electronics

Flexible Exposure Control

External Sync & Trigger

Three-Stage Peltier Cooling

Binning

IEEE 1394 FireWire Connection

Extensive Application Software Support

benefits

- Extremely high sensitivity for demanding low-light & fluorescent imaging; up to 90%+ between 500-650nm

- Previewing & focusing in real time
- 300+fps with 6x6 binning and ROI
- 30fps full resolution @ 14 bits
- Ideal for automated imaging applications

- Quantitation & imaging of low light levels

- Optimal integration over a wide range of light levels

- Tight synchronization with flashlamps, automated filters, shutters, & microscope stages

- Reduces thermal noise for low-light long exposures while providing temperature stability

- Increases sensitivity for quantitation & imaging of very low light levels
- Increases frame rate

- Simple connectivity
- Better noise performance
- Excellent connectivity ability
- Ease of use & installation
- Portability with laptop computer
- Simultaneous use of multiple cameras through a single port

- Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming functions



ROLERA-MGi FAST1394 Specifications

emccd sensor	
Light-Sensitive Pixels	512 x 512
Binning Modes	2, 3, 4, 5, 6 horizontally, arbitrary vertically
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	10µs to days
Sensor Type	e2v L3Vision CCD97, back-illuminated device
Pixel Size	16µm x 16µm
Linear Full Well	240,000e- (1x1); 800,000e- (2x2, non-EM mode)
Read Noise	<1 e- rms in EM mode
Dark Current	0.5 e-/pix/s
Cooling Technology	Three-stage Peltier cooling, chamber back-filled with nitrogen at atmosphere, assembled in a Class 1,000 cleanroom
Cooling Type	Down to -25°C, regulated, with software control in 1°C increments
Digital Output	14 bits
Readout Frequency	10, 5MHz (EM mode); 5, 1MHz (normal mode)
Frame Rate	30fps full resolution @ 14 bits (300+ maximum with binning and ROI functions)
camera	
Computer Platforms/ Operating Systems	Windows®*
Digital Interface	IEEE 1394 FireWire
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
EM Gain Control	1 to 1000 times (0-4095 DAC control)
Normal Gain Control	0.5, 1, 2
Optical Interface	2/3", C-mount optical format
Threadmount	1/4" – 20 mount
Power Requirements	96W; 12V
Weight	3.18kg (7lbs)
Warranty	2 years
Operating Environment	0 to 30°C, 80% relative humidity non-condensing
Storage Temperature	-20 to 60°C

applications

- Spinning-Disk Confocal Microscopy
- Dynamic Ratio Imaging (e.g., pH, Low-Concentration Flux)
- FRAP (Fluorescence Recovery After Photobleaching)
- Live-Cell Fluorescent Protein Imaging

spectral response

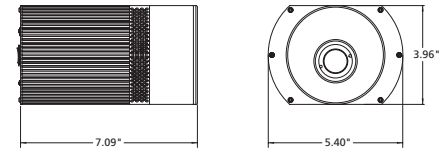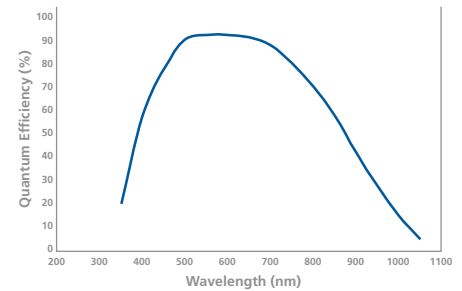

*Refer to QImaging website for detailed listing of supported operating systems.
 Note: Specifications are nominal and subject to change.

Rolera is a trademark and QImaging is a registered trademark of QImaging Corporation.
 FireWire is a trademark of Apple Computer, Inc., registered in the U.S. and other countries.
 Windows is a registered trademark of Microsoft Corporation in the United States and other countries.
 Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.